

Technical Data Sheet

Meeting Tables



QUALITY STANDARDS

Finsa top surface.

- ISO 22196 Standard: 2011.
(Certificate of Analysis No. 1023308.1E-1).
- ISO 21702 standard: 2019 and the NF EN 14476
standard: 2013 + A2: 2019.

Metal.




- Material: DD14 (EN 10111)
- ISO 45001:2018 – Occupational Health & Safety System.
(Certificate No. 20001230009449).

WARRANTY



- 5 years

Meeting Tables



H 740



L 1200, 1600*
W 1200, 1600
*Finsa top only

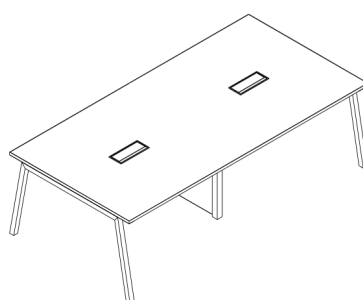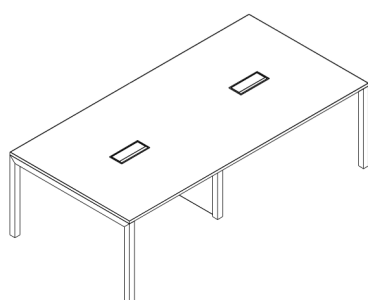


L 2400, 3200*
W 1200, 1600
*Available in 2 tops

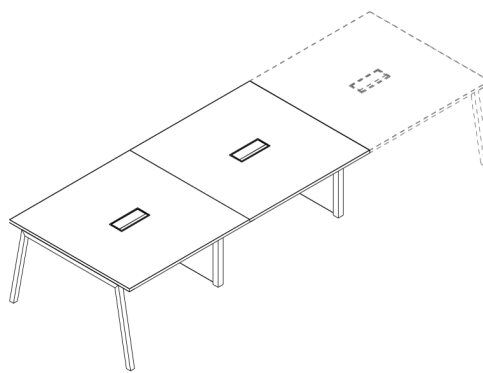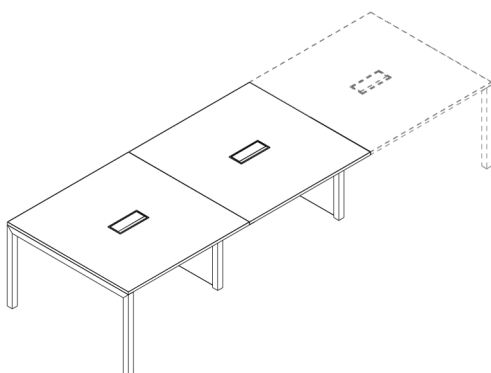


L 3600, 4200, 4800
W 1230, 1430, 1630

RANGE


Seat: 80 cm per person




4 seats
L 1200, W 1200




8 seats
L 2400, W 1200




10 seats (spacious)
L 3600, W 1200



8 seats
L 1600, W 1600





12 seats
L 3200, W 1600



16 seats
L 4800, W 1600


NB: Possibility to extend the length by ordering supplementary units.

MEETING TABLE COMPONENTS

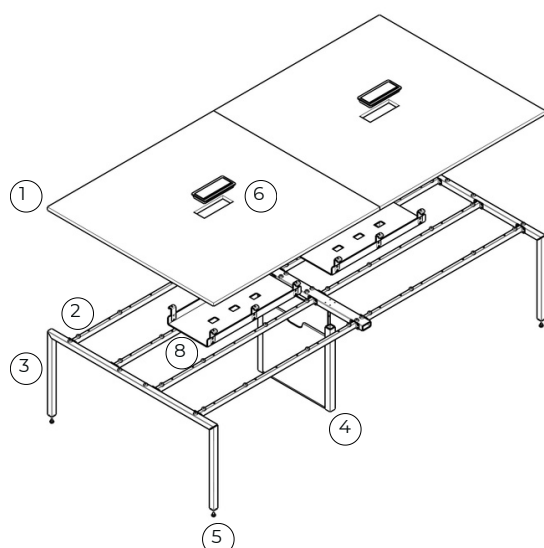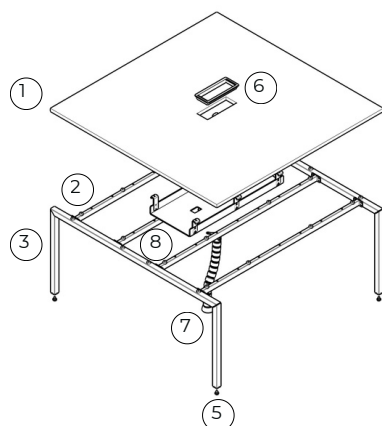


- ① Finsa Top thickness 25 mm.
- ② Top spacer 10mm.
- ③ Powder-coated metal leg.
- ④ Middle leg with cable management.
- ⑤ Glide 10mm (+10mm adjustable).
- ⑥ Soft close cable grommet.
- ⑦ Vertebrae Cable Management.
- ⑧ Cable tray.

Meeting Table Includes




Soft-close cable grommet:
300 × 110 mm



Cable tray:

- 600 × 380 mm.
- 900 × 380 mm.



Cable management:

- 600 × 50 mm, H: 600 mm
- 600 × 80 mm, H: 600 mm



Vertebrae cable management.
NB: available only for single top meeting table.

FEATURES

- Anti-bacterial surface properties supporting hygienic daily use in workspace environments.
- Anti-moisture sealed finish allowing safe cleaning and regular disinfection without surface damage.
- Anti-fingerprint surface and high scratch resistance ($\geq 6\text{NW}$ – EN 438-2 standard)
- Easy to assemble and disassemble - "metal to metal" construction Just one tool for assembling .
- Concealed cable management.

TECHNICAL INFORMATION

Desktop

- 25 mm MFC (melamine) with 2 mm ABS edging.
- 10mm spacers between desktop and base.

Metal Beam

- Metal beam - 40x20 mm.
- Powder-coated steel with welded metal plates for leg attachment
- Color-matched with leg finish.

Cable Tray

- Sheet metal 1.25 mm.
- Attachment brackets 3mm - attached to beams.

Legs

- A-LEG: 40x40 mm, t:1.5 mm*
- U-LEG: 40x40 mm, t:1.5 mm*
- Powder-coated.
- Plastic levelling glides (+10 mm).

DESKTOP FINISHES



060 Blanco



272 Roble Poema



20B Cerezo



03C Nogal



20N Roble Sinatra



Negro*
(available in 19 mm only)

NB: Reference to sample for texture.


METAL FINISHES



Black



Grey



White



Additional colors upon request (MOQ).

CABLE GROMMET



Black



Grey matte